


2

SHOWCASE RANGE

- Confectionery Showcase - Laminated Base
- Confectionery Showcase - Stainless Steel Base
- Rectangular Confectionery Showcase - Laminated Base
- Rectangular Confectionery Showcase - Stainless Steel Base
- Table Top Display Cooler

1



Well known and high efficient compressor.

2



Digital adjustable temperature control. Temperature indicators are shown at the display of controller. Certified by CE & UL standard.

3



Bigger display compartment is constructed with hardened glass.

4



4 sides clear glass and internal LED lighting for excellent display.

5



Solid stainless steel shelf bracket.




CONFECTIONERY SHOWCASE - LAMINATED BASE

- Blower System
- Double Curved Glass




CS1200-B-3


3 Tiers



Back View



Front View



Side View

HIGHLIGHTS

Black Silver

Vinyl laminated base.

Suitable for cake and confectionery.

An ideal showcase, which creates impulse sales.

Display compartment is constructed

with double layer hardened glass.

4 sides clear glass with front curved glass

and internal lighting for excellent display.

Temperature of entire glass case is even,

ensure by forced by forced air circulation.

Automatic defrost system

saves energy consumption and provide shortest possible defrost cycle.

Refrigeration system protected from corrosion

by urethane-treated evaporator coil.

Blower system (assisted with fan)

will ensure homogenous coolness in the storage space.

Oversized coil and low velocity fan system

maintain high humidity and low temperature and product freshness.

Environmental friendly refrigerant

(CFC and HCFC Free) R134a.

3 tier removable and adjustable shelves.

Interior lighting,

shielded LED interior lighting assures safety.

Black base glass shelves, for easier cleaning

and comply with sanitation requirement. White base enhance eye catching display.

Tested at ambient temperature of 32°C,

with no load.

TABLE INFO



MODEL - 3 Tier	CS900-B-3	CS1200-B-3	CS1500-B-3	CS1800-B-3	CS2400-B-3
Temperature°C (celsius)	+1 to +4	+1 to +4	+1 to +4	+1 to +4	+1 to +4
External Dimension (mm)	900 x 710 x 1350	1200 x 710 x 1350	1500 x 710 x 1350	1800 x 710 x 1350	2400 x 710 x 1350
Internal Dimension (mm)	780 x 580 x 700	1080 x 580 x 700	1380 x 580 x 700	1680 x 580 x 700	2280 x 580 x 700
External Finishing	Stainless Steel Laminated Steel Sheet	Stainless Steel Laminated Steel Sheet	Stainless Steel Laminated Steel Sheet	Stainless Steel Laminated Steel Sheet	Stainless Steel Laminated Steel Sheet
Internal Finishing	Stainless Steel Aluminium	Stainless Steel Aluminium	Stainless Steel Aluminium	Stainless Steel Aluminium	Stainless Steel Aluminium
Voltage/ Frequency (V/Hz)	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz
Weight (kgs)	201	235	270	321	415
Compressor	1/3Hp	1/4Hp	1/2Hp	3/4Hp	3/4Hp
Wattage (W)	800	1000	1100	1400	1700
Ampere (A)	5.0	6.0	6.0	8.0	9.5
Energy Consumption (kw/ 24h)	17.5	19.9	22.8	25.7	32.7
Condenser	Air Cooled	Air Cooled	Air Cooled	Air Cooled	Air Cooled
System	Force Convection	Force Convection	Force Convection	Force Convection	Force Convection
Refrigerant/ Grams	R134a / 400g	R134a / 560g	R134a / 690g	R134a / 800g	R134a / 900g
Defrost System	Forced Air Circulation	Forced Air Circulation	Forced Air Circulation	Forced Air Circulation	Forced Air Circulation
Temperature Control	Digital	Digital	Digital	Digital	Digital
Gross Volume (Litres)	310	415	520	625	835
Unit For 20ft Container	14	11	10	7	4
Unit For 40ft Container	20	27	22	16	8

Optional: To include key lock, prevents unauthorised access to the stores confectioneries.

As product improvement is an on going process, we reserve the right to change specifications or design without notice.


CONFECTIONERY SHOWCASE - STAINLESS STEEL BASE

- Blower System
- Double Curved Glass




CS1200-SS-3


3 Tiers

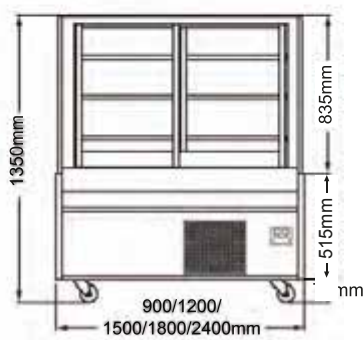

Back View



Front View



Side View

HIGHLIGHTS

Suitable for cake and confectionery.

An ideal showcase, which creates impulse sales.

Display compartment is constructed

with double layer hardened glass.

4 sides clear glass with front curved glass

and internal lighting for excellent display.

Temperature of entire glass case is even,

ensure by forced by forced air circulation.

Automatic defrost system

saves energy consumption and provide shortest possible defrost cycle.

Refrigeration system protected from corrosion

by urethane-treated evaporator coil.

Blower system (assisted with fan)

will ensure homogenous coolness in the storage space.

Oversized coil and low velocity fan system

maintain high humidity and low temperature and product freshness.

Environmental friendly refrigerant

(CFC and HCFC Free) R134a.

3 tier removable and adjustable shelves.

Interior LED lighting,

shielded interior LED lighting assures safety.

Black base glass shelves, for easier cleaning

and comply with sanitation requirement. White base enhance eye catching display.

Tested at ambient temperature of 32°C,

with no load.

TABLE INFO



MODEL - 3 Tiers	CS900-SS-3	CS1200-SS-3	CS1500-SS-3	CS1800-SS-3	CS2400-SS-3
Temperature°C (celsius)	+1 to +4	+1 to +4	+1 to +4	+1 to +4	+1 to +4
External Dimension (mm)	900 x 710 x 1350	1200 x 710 x 1350	1500 x 710 x 1350	1800 x 710 x 1350	2400 x 710 x 1350
Internal Dimension (mm)	860 x 585 x 735	1160 x 585 x 735	1460 x 585 x 735	1760 x 585 x 735	2360 x 585 x 735
External Finishing	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel
Internal Finishing	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel
Voltage/ Frequency (V/Hz)	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz
Weight (kgs)	173	208	246	290	380
Compressor	1/3Hp	1/2Hp	1/2Hp	3/4Hp	3/4Hp
Wattage (W)	450 - 600	600 - 700	700 - 800	1000 - 1400	1500 - 1700
Ampere (A)	3.0 - 4.0	3.5 - 4.5	4.5 - 5.5	6.0 - 9.0	8.5 - 9.0
Energy Consumption (kw/ 24h)	10.80 - 14.40	14.40 - 16.80	16.80 - 19.20	24.00 - 33.60	36.00 - 40.80
Condenser	Air Cooled	Air Cooled	Air Cooled	Air Cooled	Air Cooled
System	Force Convection	Force Convection	Force Convection	Force Convection	Force Convection
Refrigerant/ Grams	R134a / 400g	R134a / 760g	R134a / 650g	R134a / 750g	R134a / 900g
Defrost System	Forced Air Circulation	Forced Air Circulation	Forced Air Circulation	Forced Air Circulation	Forced Air Circulation
Temperature Control	Digital	Digital	Digital	Digital	Digital
Gross Volume (Litres)	310L	415L	520L	625L	835L
Unit For 20ft Container	14	11	10	7	4
Unit For 40ft Container	30	24	22	16	8

Note:

Due to continuing product improvement, material and specifications are subject to change without notice.


RECTANGULAR CONFECTIONERY SHOWCASE - LAMINATED BASE

- Blower System
- Double Glass



SQSC1200-B-3


3 Tiers



Back View



Front View



Side View

HIGHLIGHTS

Black Silver

Vinyl laminated base.

Suitable for cake and confectionery.

An ideal showcase, which creates impulse sales.

Display compartment is constructed

with double layer hardened glass.

4 sides clear glass with front curved glass

and internal lighting for excellent display.

Temperature of entire glass case is even,

ensure by forced by forced air circulation.

Automatic defrost system

saves energy consumption and provide shortest possible defrost cycle.

Refrigeration system protected from corrosion

by urethane-treated evaporator coil.

Blower system (assisted with fan)

will ensure homogenous coolness in the storage space.

Oversized coil and low velocity fan system

maintain high humidity and low temperature and product freshness.

Environmental friendly refrigerant

(CFC and HCFC Free) R134a.

3 tier removable and adjustable shelves.

Interior lighting,

shielded LED interior lighting assures safety.

Black base glass shelves, for easier cleaning

and comply with sanitation requirement. White base enhance eye catching display.

Tested at ambient temperature of 32°C,

with no load.

TABLE INFO



MODEL - 3 Tier	SQSC900-B-3	SQSC1200-B-3	SQSC1500-B-3	SQSC1800-B-3	SQSC2400-B-3
Temperature°C (celsius)	+1 to +4	+1 to +4	+1 to +4	+1 to +4	+1 to +4
External Dimension (mm)	900 x 710 x 1350	1200 x 710 x 1350	1500 x 710 x 1350	1800 x 710 x 1350	2400 x 710 x 1350
Internal Dimension (mm)	780 x 580 x 700	1080 x 580 x 700	1380 x 580 x 700	1680 x 580 x 700	2280 x 580 x 700
External Finishing	Stainless Steel Laminated Steel Sheet	Stainless Steel Laminated Steel Sheet	Stainless Steel Laminated Steel Sheet	Stainless Steel Laminated Steel Sheet	Stainless Steel Laminated Steel Sheet
Internal Finishing	Stainless Steel Aluminium	Stainless Steel Aluminium	Stainless Steel Aluminium	Stainless Steel Aluminium	Stainless Steel Aluminium
Voltage/ Frequency (V/Hz)	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz
Weight (kgs)	211	245	280	331	425
Compressor	1/2Hp	1/2Hp	1/2Hp	3/4Hp	3/4Hp
Wattage (W)	800	1000	1100	1400	1700
Ampere (A)	5.0	6.0	6.0	8.0	9.5
Energy Consumption (kw/ 24h)	17.5	19.9	22.8	25.7	32.7
Condenser	Air Cooled	Air Cooled	Air Cooled	Air Cooled	Air Cooled
System	Force Convection	Force Convection	Force Convection	Force Convection	Force Convection
Refrigerant/ Grams	R134a / 400g	R134a / 560g	R134a / 690g	R134a / 800g	R134a / 900g
Defrost System	Forced Air Circulation	Forced Air Circulation	Forced Air Circulation	Forced Air Circulation	Forced Air Circulation
Temperature Control	Digital	Digital	Digital	Digital	Digital
Gross Volume (Litres)	370	500	630	770	1030
Unit For 20ft Container	14	11	10	7	4
Unit For 40ft Container	30	24	22	16	8

Optional: To include key lock, prevents unauthorised access to the stores confectioneries.

As product improvement is an on going process, we reserve the right to change specifications or design without notice.


RECTANGULAR CONFECTIONERY SHOWCASE - STAINLESS STEEL BASE

- Blower System
- Double Glass




SQSC1200-SS-3


3 Tiers

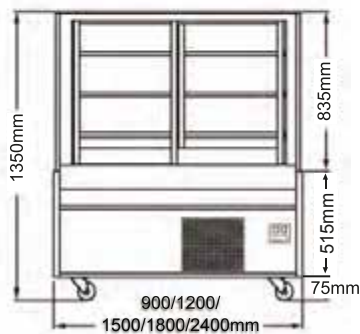

Back View



Front View



Side View

HIGHLIGHTS

Suitable for cake and confectionery.

An ideal showcase, which creates impulse sales.

Display compartment is constructed

with double layer hardened glass.

4 sides clear glass with front curved glass

and internal lighting for excellent display.

Temperature of entire glass case is even,

ensure by forced by forced air circulation.

Automatic defrost system

saves energy consumption and provide shortest possible defrost cycle.

Refrigeration system protected from corrosion

by urethane-treated evaporator coil.

Blower system (assisted with fan)

will ensure homogenous coolness in the storage space.

Oversized coil and low velocity fan system

maintain high humidity and low temperature and product freshness.

Environmental friendly refrigerant

(CFC and HCFC Free) R134a.

3 tier removable and adjustable shelves.

Interior LED lighting,

shielded interior LED lighting assures safety.

Black base glass shelves, for easier cleaning

and comply with sanitation requirement. White base enhance eye catching display.

Tested at ambient temperature of 32°C,

with no load.

TABLE INFO



MODEL - 3 Tiers	SQSC900-SS-3	SQSC1200-SS-3	SQSC1500-SS-3	SQSC1800-SS-3	SQSC2400-SS-3
Temperature°C (celsius)	+1 to +4	+1 to +4	+1 to +4	+1 to +4	+1 to +4
External Dimension (mm)	900 x 710 x 1350	1200 x 710 x 1350	1500 x 710 x 1350	1800 x 710 x 1350	2400 x 710 x 1350
Internal Dimension (mm)	860 x 585 x 735	1160 x 585 x 735	1460 x 585 x 735	1760 x 585 x 735	2360 x 585 x 735
External Finishing	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel
Internal Finishing	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel
Voltage/ Frequency (V/Hz)	230V/1/50Hz	230V/1/50Hz	230V/1/50Hz	230V/1/50Hz	230V/1/50Hz
Weight (kgs)	190	244	282	338	442
Compressor	1/3Hp	1/2Hp	1/2Hp	3/4Hp	3/4Hp
Wattage (W)	450 - 600	600 - 700	700 - 800	1000 - 1400	1500 - 1700
Ampere (A)	3.0 - 4.0	3.5 - 4.5	4.5 - 5.5	6.0 - 9.0	8.5 - 9.0
Energy Consumption (kw/ 24h)	10.80 - 14.40	14.40 - 16.80	16.80 - 19.20	24.00 - 33.60	36.00 - 40.80
Condenser	Air Cooled	Air Cooled	Air Cooled	Air Cooled	Air Cooled
System	Force Convection	Force Convection	Force Convection	Force Convection	Force Convection
Refrigerant/ Grams	R134a / 400g	R134a / 760g	R134a / 650g	R134a / 750g	R134a / 900g
Defrost System	Forced Air Circulation	Forced Air Circulation	Forced Air Circulation	Forced Air Circulation	Forced Air Circulation
Temperature Control	Digital	Digital	Digital	Digital	Digital
Gross Volume (Litres)	370.5L	503L	635L	768L	1032L
Unit For 20ft Container	14	11	10	7	4
Unit For 40ft Container	30	24	22	16	8

Optional: To include key lock, prevents unauthorised access to the stores confectioneries.

As product improvement is an on going process, we reserve the right to change specifications or design without notice.

TABLE TOP DISPLAY COOLER


- Blower System
- Double Curved Glass




DC 211




DC 311

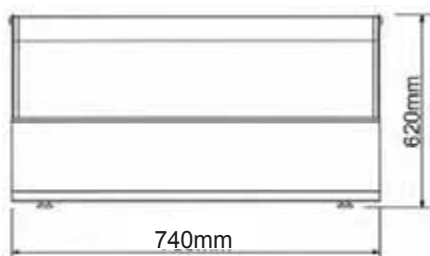

Front View

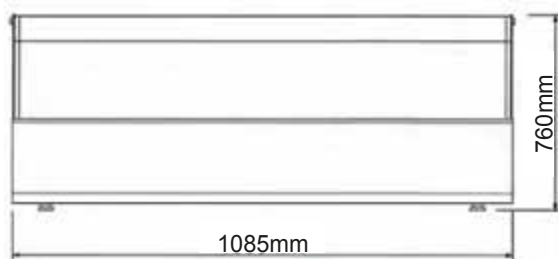

Front View



Side View

HIGHLIGHTS

An ideal showcase,
which creates impulse sales.

Display Compartment
is constructed with double glass.

4 sides clear glass
with front curved glass and internal lighting for excellent display.

Temperature of entire glass case is even,
ensure by forced air circulation.

High-density Cyclo-isopentane Polyurethane
insulated body saves energy.

Automatic defrost system
saves energy consumption and provide shortest possible defrost cycle.

Refrigeration system protected from corrosion
by urethane-treated evaporator coil.

Blower system (assisted with fan)
will ensure homogenous coolness in the storage space.

Oversizes coil and low velocity fan system
maintain high humidity and low temperature and product freshness.

Environmental friendly refrigerant
(CFC and HCFC Free) R134a.

Interior lighting,
shielded LED interior lighting assures safety.

Tested at ambient temperature of 27°C,
with no load.

TABLE INFO

MODEL	DC 211	DC 311
Temperature°C (Celsius)	+1 to +4	+1 to +4
External Dimension (mm)	740 x 580 x 760	1085 x 580 x 760
Gross Volume (Litres)	76	113
Voltage/ Frequency (V/ Hz)	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz
Weight (Kgs)	50	75
Compressor	1/6Hp	1/5Hp
Wattage (W)	361 - 399	447 - 493
Ampere (A)	2.6 - 3.0	2.8 - 3.2
Energy Consumption (Kw/ 24h)	7.0 - 7.8	8.0 - 8.9
Refrigerant/ Grams	R134a / 320g	R134a / 320g
Defrost System	Forced Air Circulation	Forced Air Circulation
Temperature Control	Digital	Digital
Unit For 20ft Container	36	30
Unit For 40ft Container	72	63